


DS3 & HS4

Burglary Protection Solution



Certified Burglary-Resistance

- Applus-LGAI
- EN 1143-1
- Grades III & IV



DS3 & HS4

Burglary Protection Solution

DS3 and HS4 safes offer certified burglary protection for your cash, valuables and important documents. The safes are easy to operate, with rectangular-shaped bolts for maximum security.

Did you know?

The locks used on safes are certified to ensure that the safe maintains the correct level of burglary protection

Product Overview

The DS3 safe is available in seven sizes, from 40 to 420 litres and the HS4 model has a range of six sizes, spanning 80 to 420 litres.

DS3 and HS4 safes can easily be integrated into your existing office or factory space.

All the models in the range have a 65mm-thick protective barrier built using a specially designed composite material. This is strengthened by the durable steel boltwork.

Active relockers and reinforced hinges provide extra protection from attacks.

In addition, a deposit slot is available on certain models.

Deposit Slot

For models 110, 150 and 275 (HS4 only)

Night and Day Deposit Slot

Version 80 for models 110 and 150

Version 220 for models 110 and 150

Burglary Protection

DS3 is tested by the independent testing agency, Applus-LGAI (Laboratorio General de Ensayos y Certificación), in accordance with EN 1143-1 for Grade III.

HS4 is tested by Applus-LGAI in accordance with EN 1143-1 for Grade IV.



Ev'Hora



MxB key



Moneo



Nectra



Interior Fittings

To help improve the organisation of your valuables.

◀ Interior fittings (from left): Removable shelf, lockable compartment

Locks

In order to suit different security requirements, DS3 and HS4 safes are designed to be fitted with a variety of locking systems. Thanks to Fichet-Bauche's patented mechanical and electronic locks, all of which are A2P/EN 1300 certified, your valuables are given the protection they require.

The MxB – level B/E – is a high-security mechanical lock. Its innovative shape and design, which allows for over 10 million different possible keys, make replication extremely difficult.

The MC4 – level A/E – is a mechanical combination lock capable of allowing 28 000 different codes.

The Moneo mechanical combination lock – level C/E – permits several million different codes. Its scramble-upon-opening feature ensures that the dials are automatically reset to 0 after being used.

The Nectra electronic lock – level B/E – generates more than 110 million different code combinations and offers several levels of functionality. The standard version has 1 master code and 7 user codes, wrong-code blocking, time delay and a duress alarm. This can be upgraded with the audit trail function which records up to 500 events.

The Ev'Hora electronic lock – level B/E – is designed to be used as part of your security network. Ev'Hora locks are capable of exchanging and sharing information with one another and with your system, enabling you to rapidly modify security procedures.

Burglary Testing Procedure

In order to obtain the EN 1143-1 classification, the safes have been subjected to a series of stringent break-in tests using a variety of tools. Points are awarded according to the length of time each break-in attempt took and the total number of points determines the grade of the safe.

Test Verification

Once tested, products are analysed by the test laboratory in order to verify that they correspond to the technical drawings delivered prior to the test.

Fichet-Bauche Guarantee

Fichet-Bauche products are designed and manufactured in accordance with the ISO 9001 standard for Quality Management Systems, ISO 18001 for Occupational Health and Safety Management Systems and ISO 14000 for Environmental Management Systems. All DS3 and HS4 safe components are tested by the Fichet-Bauche laboratory in compliance with the current European standards.

SINGLE LOCK

MxB

LOCK COMBINATIONS

MxB + MxB

MxB + MC4

MxB + Moneo S

MxB + Nectra (Basic or Audit)

MxB + Ev'Hora

Sledgehammer



Drill




Disc cutter




DS3 & HS4

Technical Specifications

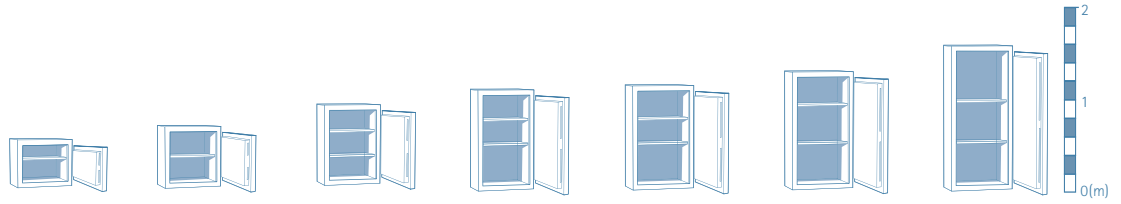

Dimensions (mm)	DS3 40	DS3 80	DS3 110	DS3 150	DS3 275	DS3 350	DS3 500
External height	470	640	800	1040	1140	1370	1650
External width	590	620	620	620	780	780	780
External depth	450	530	530	530	620	620	620
External width (door open 90°)	590	620	620	620	780	780	780
External width (door open 180°)	1100	1170	1170	1170	1490	1490	1490
Internal height	340	510	670	910	1010	1240	1520
Internal width	460	490	490	490	650	650	650
Internal depth	256	336	336	336	426	426	426
Interior capacity (litres)	40	84	110	150	280	343	421
Weight (kg)	225	319	380	469	650	765	900

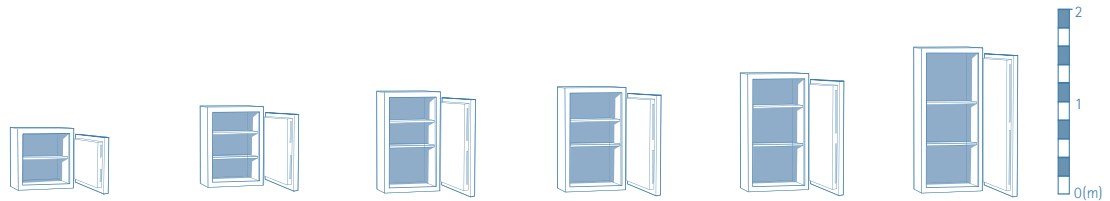

Dimensions (mm)	HS4 80	HS4 110	HS4 150	HS4 275	HS4 350	HS4 500
External height	640	800	1040	1140	1370	1650
External width	620	620	620	780	780	780
External depth	530	530	530	620	620	620
External width (door open 90°)	620	620	620	780	780	780
External width (door open 180°)	1170	1170	1170	1490	1490	1490
Internal height	510	670	910	1010	1240	1520
Internal width	490	490	490	650	650	650
Internal depth	336	336	336	426	426	426
Interior capacity (litres)	84	110	150	280	343	421
Weight (kg)	329	390	479	660	775	910